


# HF-Radiating Cables



RoHS

HF HDPE

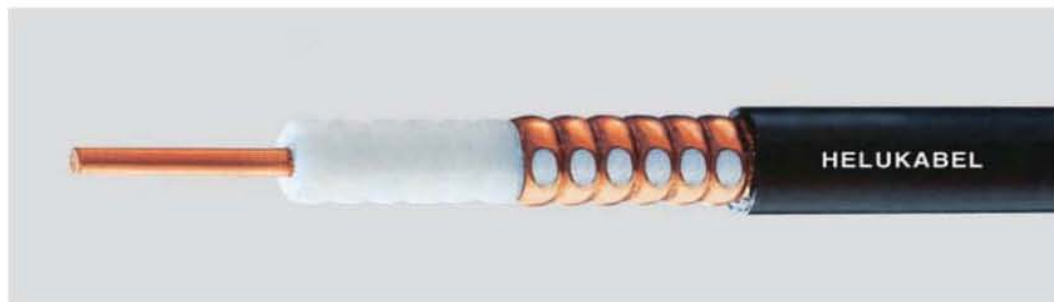

## Cable structure

The coax structure is identical for all sizes: inner conductor, foamed dielectric, outer conductor, outer jacket black. This assures the same connector plugs and clamps can always be used. The only difference between the various variants is the form of the opening of the outer conductor. These forms determine the relationship between the inner and outer conductors. Electrical characteristics, such as attenuation, coupling loss, reflection factor as well as environmental conditions (such as dust, salt, moisture, etc.) are influenced in this way. The optimum cable can then be determined from the knowledge of these parameters and the application data (reach, frequency range, etc.) The technical differences can be seen from the data for the system loss and the 120 dB length. The outer jacket is made of black polyethylene.

Designation	Nominal size	Outer Ø ca. mm	Weight kg / km	1 km system loss (dB)					120 dB-length (m)					Part no.
				450	900	1800	2200	2400	450	900	1800	2200	2400	
Corrugations, groups of apertures at large intervals														
HALFU 12-50	1/2"	15,0	290,0	129	155	195	210	216	830	560	350	310	295	800171
HRLF 58-50	5/8"	22,0	380,0	113	133	-	-	-	1300	900	-	-	-	800172
HRLF 78-50	7/8"	28,7	620,0	93	110	-	-	-	1965	1220	-	-	-	800173
HRLFW 78-50	7/8"	28,7	620,0	100	114	150	-	-	1750	1150	650	-	-	800174
HRLF 114-50	1 1/4"	38,8	920,0	86	103	-	-	-	2580	1450	-	-	-	800175
HRLFW 114-50	1 1/4"	38,8	920,0	90	100	144	-	-	2500	1630	710	-	-	800176
HRLFW 158-50	1 5/8"	48,0	1200,0	92	97	120	-	-	2650	1850	1000	-	-	800177
Corrugations, groups of vertical slots at short intervals														
HRLKW 12-50	1/2"	15,0	290,0	124	154	274	-	-	930	625	300	-	-	800178
HRLKU 12-50	1/2"	15,0	290,0	126	160	289	324	349	900	600	270	235	220	800179
HRLKW 58-50	5/8"	22,0	380,0	107	127	168	-	-	1340	930	570	-	-	800180
HRLKU 58-50	5/8"	22,0	380,0	110	125	177	197	208	1265	915	490	425	400	800181
HRLKW 78-50	7/8"	28,7	620,0	95	115	262	-	-	1780	1090	320	-	-	800182
HRLKU 78-50	7/8"	28,7	620,0	101	113	166	190	212	1650	1135	560	460	395	800183
HRLKW 114-50	1 1/4"	38,8	920,0	90	103	163	-	-	2300	1440	610	-	-	800184
HRLKU 114-50	1 1/4"	38,8	920,0	96	101	125	145	156	2115	1550	925	695	615	800185
HRLKU 158-50	1 5/8"	48,0	1200,0	101	95	113	123	133	2150	1900	1150	950	820	800186
Corrugations, groups of vertical slots at variable intervals														
HRLV 114-50	1 1/4"	38,8	920,0	96	89	-	-	-	-	-	-	-	-	800187
HRLVW 114-50	1 1/4"	38,8	920,0	84	86	122	-	-	-	-	-	-	-	800188
HRLVU 158-50	1 5/8"	48,0	1200,0	99	82	95	97	102	-	-	-	-	-	800189
Corrugations, groups of apertures, sloping slots														
HRAY 58-50	5/8"	22,0	400,0	103	134	-	-	-	1440	810	-	-	-	800190
HRAY 78-50	7/8"	28,7	640,0	95	129	-	-	-	1760	870	-	-	-	800191
HRAY 114-50	1 1/4"	38,8	980,0	87	103	-	-	-	2570	1380	-	-	-	800192
HRAY 158-50	1 5/8"	48,0	1200,0	108	106	120	132	157	1670	1500	1000	815	600	800193
Corrugations, groups of milled slots														
HRCF 38-50	3/8"	12,0	130,0	159	196	259	-	-	540	395	250	-	-	800194
HRCF 12-50	1/2"	16,0	230,0	124	151	202	225	238	930	630	390	290	240	800195
HRCF 78-50	7/8"	28,0	570,0	105	122	155	166	169	1460	960	600	530	515	800196
HRCF 114-50	1 1/4"	40,0	950,0	102	113	134	148	153	1715	1180	775	605	555	800197
HRCF 158-50	1 5/8"	51,0	1350,0	100	109	122	137	143	2030	1365	960	680	605	800198

Dimensions and specifications may be changed without prior notice.

## Application

Radiating coax cables permit communication in areas where electromagnetic propagation is impeded, undesirable, or impossible. This may be the case in tunnels, mines, buildings along railway routes and lines, as well as in large building complexes, such as exhibition centres and airports.