

SEALCON




Call Today! Toll Free
800-456-9012
www.sealconusa.com





Circular Connectors

Sizes: M16, M23, M27, M40, RJ45, Ethernet, PoE, Twilock, Twintus, Etc.
Signal: 3 - 28 pins (8 - 20 Amps)
Power: 6 & 8 pins (8 - 55 Amps)
Types: Standard, Straight, Elbow, Panel Mount, Push-Pull, Over-mold, RJ45 & PoE (Power Over Ether)
Applications: Robotic, Medical, Motion Technology, Automation, Packaging, Sensors, Renewable Energy, etc.

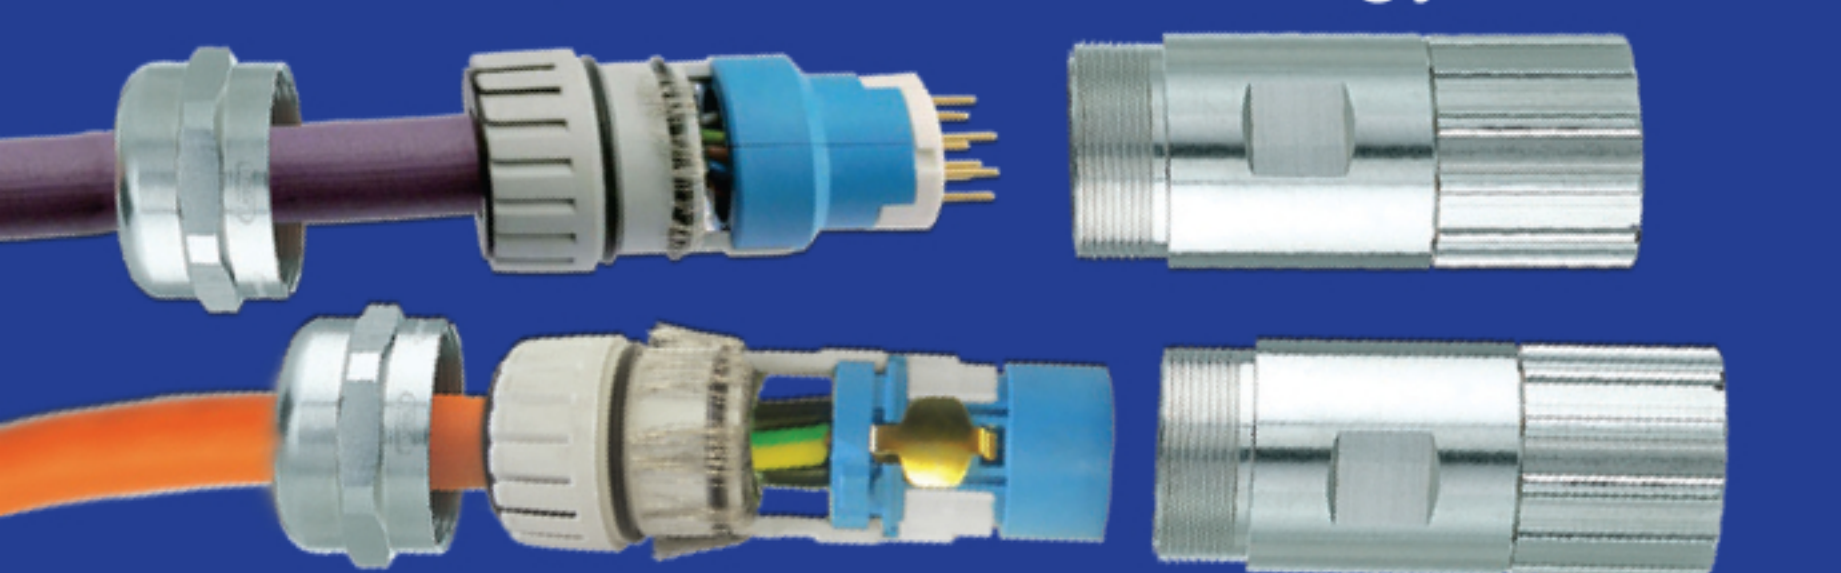


Cable Glands & Connectors for Hazardous Duty Locations

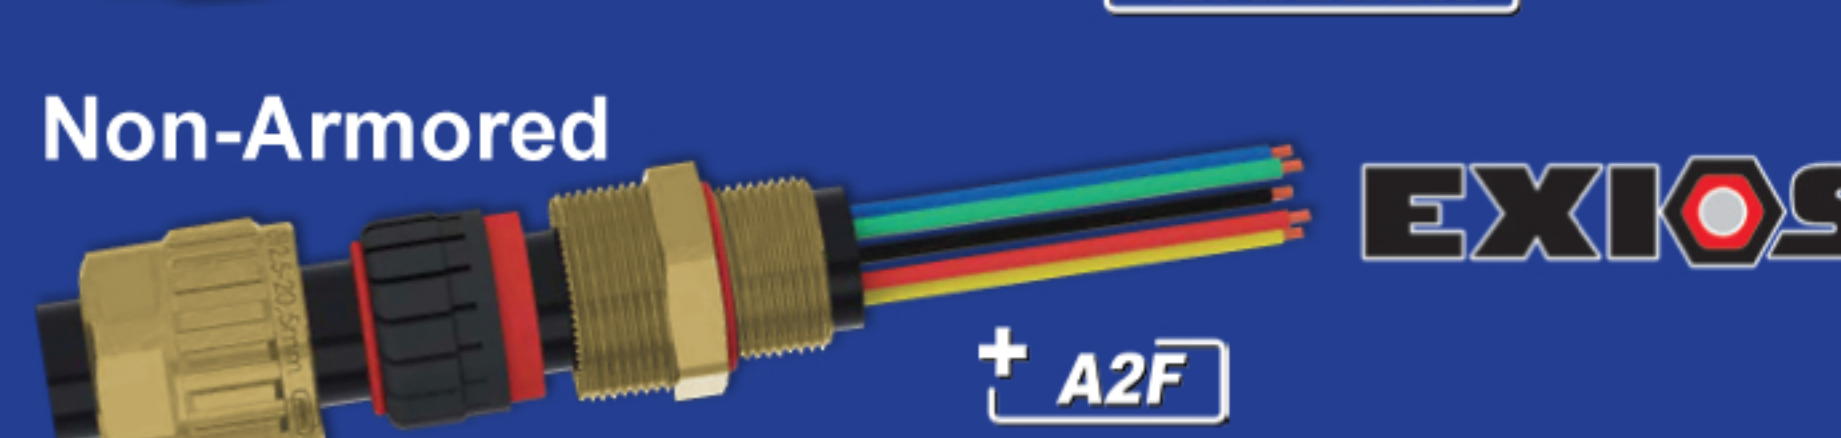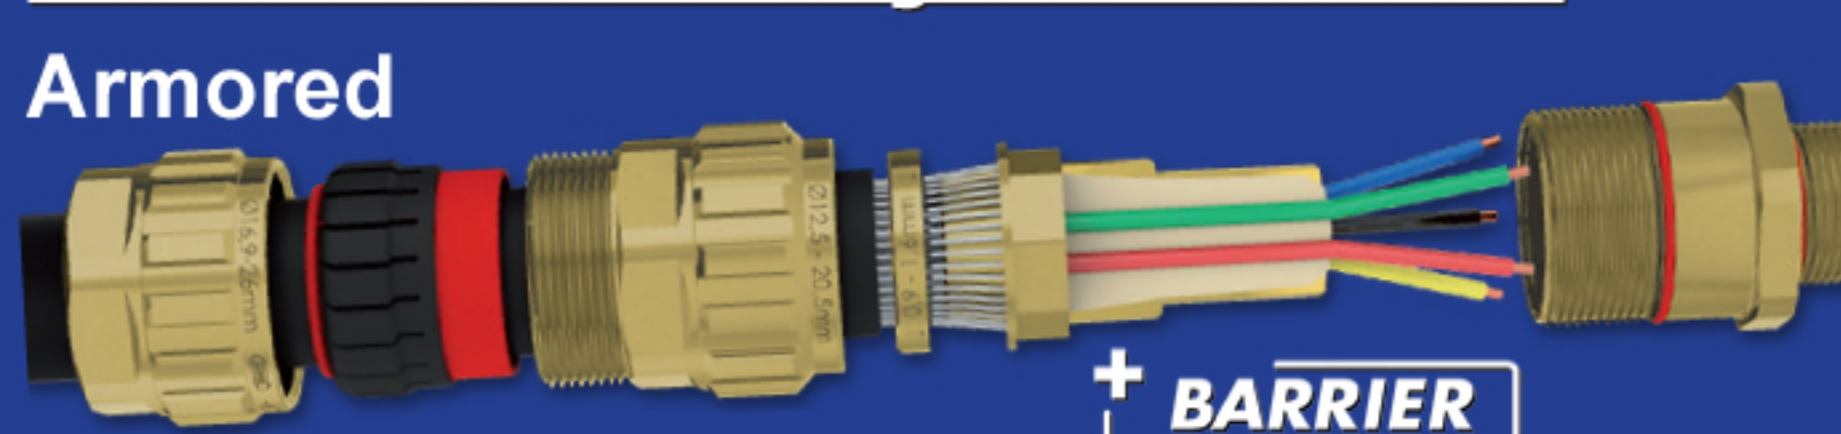

Approvals: IECEx, ATEX, Ex-d, Ex-e, Ex-i
Zones: 1, 2, 20, 21, 22
Class: I, II, III & **Division:** 1, 2
Included: Silicone Seals & O-Rings Zero Torsion on Cable Core & Armor, Dual Seal Fast & Easy Assembly with Maximum Grip, IP 68 (5 BAR), Halogen & Phosphorous-free

ROMEX® - Registered Trademark of the Southwire Company

Our Dependable Source for your Cable Glands, Connectors, Enclosures & Accessorie Needs!

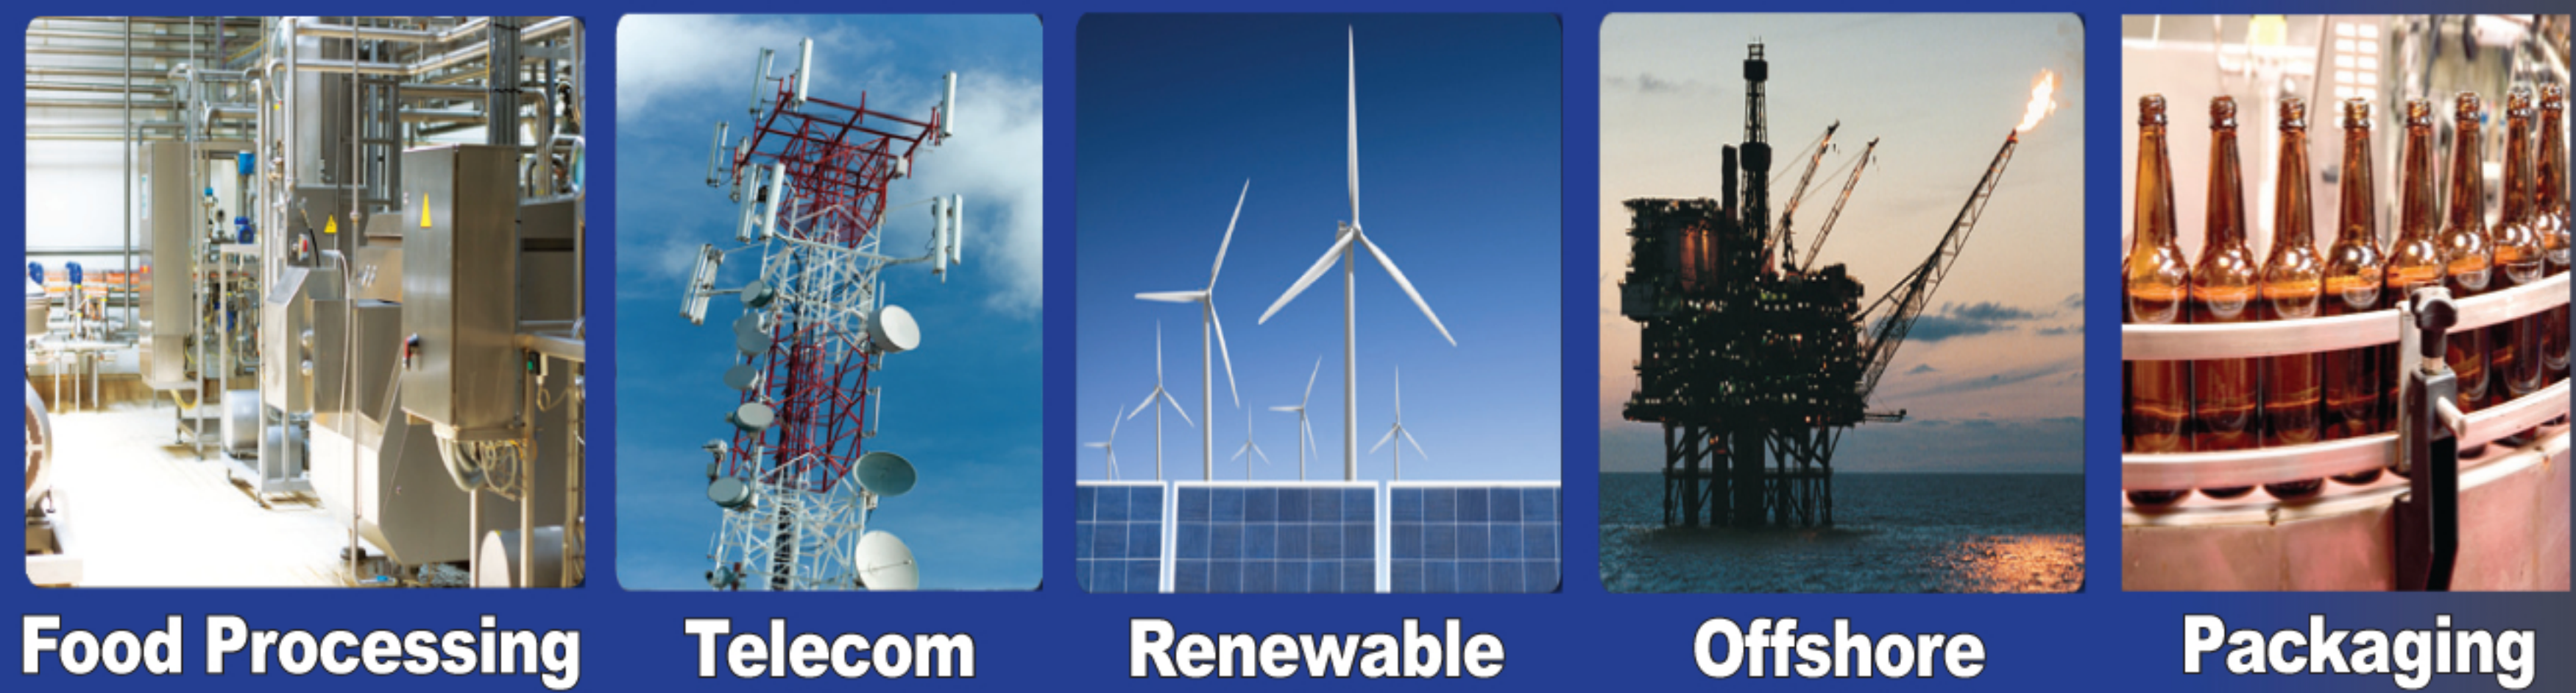

2D / 3D CAD!

Featured Products

Liquid Tight Strain Relief Fittings, Cable Glands, Cord Grips (Standard / Elongated / EMI & RFI / Intrinsic / Clamping)

Materials: Nylon, Nickel Plated Brass, 303/316 Stainless Steel, PVDF (Viton®) & more!
Threads: NPT, Metric, PG & BSPP; NEMA 6 (IP 69K), V0 Rated
Types: Standard, Elongated Thread, Reduced / Enlarged Body, Elbow, High Performance w/ Clamp, EMI/ RFI Proof (Standard & Feed-Through), Intrinsic Safe, WADI (Mini & XL) (Smallest & Largest Cable O.D.), UL f1 (746C)
Cable Range: 0.08 - 3.54" (2 - 90 mm)



316L Stainless Steel Cable Gland for Food Processing

....no more nooks and crannies!

Smooth Bell Top Design prevents residue build-up Incorporates our secure Built-in IP68/69K Liquid Tight Strain Relief Fitting w/ Silicon Seals; No Cavities/Sharp Corners, Preventing Materials from Sticking, Avoiding Bacteria & Micro-Organism Deposits
Tempature Rated: -40°C to 120°C
Sizes: M12, M16, M20, M25 & M32 x 1.5, (More sizes planned)
Applications: Beverage, Bottling Plants, Meat Packaging & Cutting, Dairy, Agricultural, Pulp, Paper, Medical, Pharma, Clean Room, etc.

For more information call us or visit our website!



V0 Rated!

One-Stop Shopping!

No Minimum Orders!

Quantity Discounts!

Our Service makes the Difference!

Conduit System

High Pull-Out Resistance, Robust Performance, Long Life Expectancy, Fast/Easy Installation, No tools required!

Material: Nylon 6/6, NEMA 4, IP 54/65


Conduit: Standard and Super Flex Corrugated Conduit.

Fittings: Push-in, Turn-to-Seal, Snapclik-DUO (Double-Sealed Combination Conduit & Cable Strain Relief Fittings, Flange / Bulkhead, Mounting Brackets.



One Dependable Source! Your Solution House!

Complete Your Solutions or Application Needs!

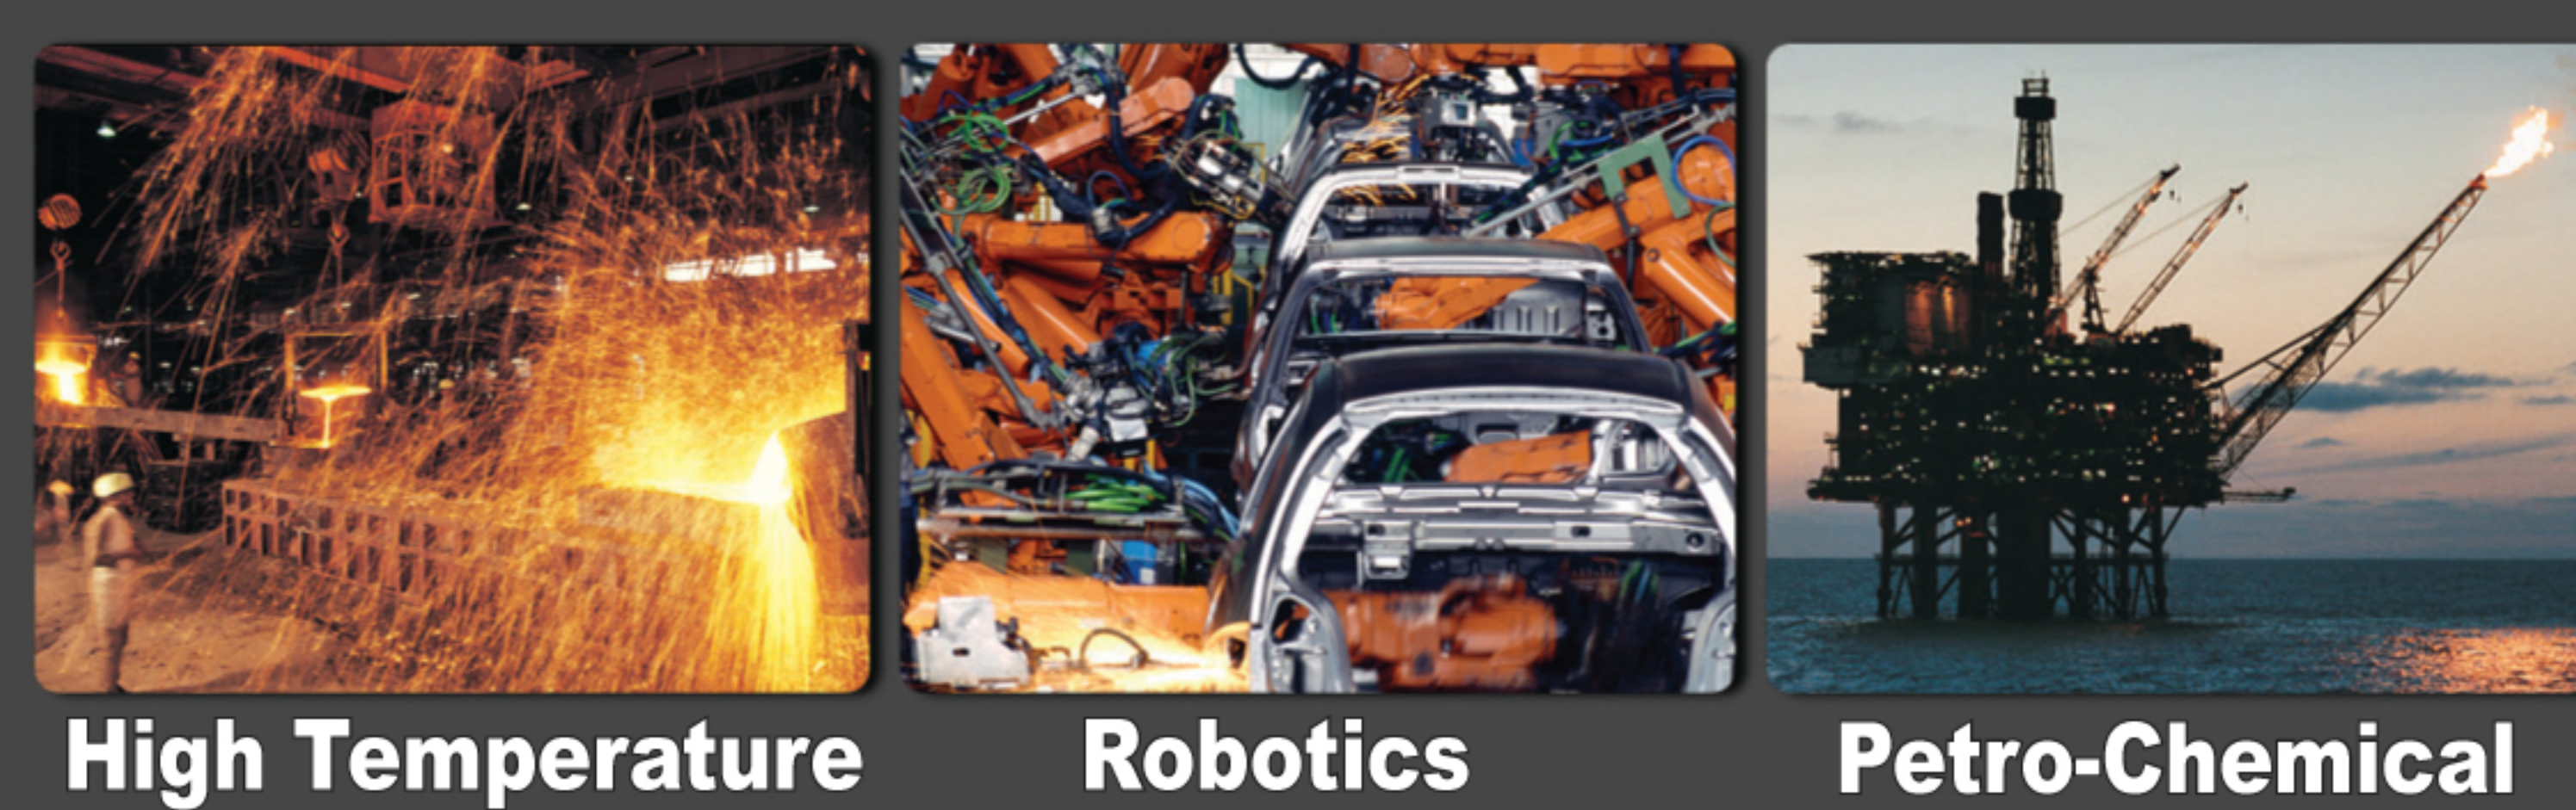

Call Today! Toll Free
800-677-8942
www.hitechcontrols.com



HI-TECH CONTROLS



Pneumatics Components

Fittings: Brass Pipe, Composite, Pro-Fit®, Acetal/Polypropylene Push-In, Barb, Threaded, Stainless Steel

Valves: 2 & 3 Way, Mechanical, Manual, Needle, Pressure Control, Air-Pilot & Flow Control Valves


Cylinders: Mini-Cylinders, Tie-Rod & Aluminum Profile Cylinders

FRL: Filters, Regulators, Lubricators

Tubing: Nylon, Vinyl, Polyvinyle Chloride (PVC) & Polyethylene



- Expandable
- Impact Resistant
- Harsh Environment
- Hazardous Area
- Offshore (DNV Rated)

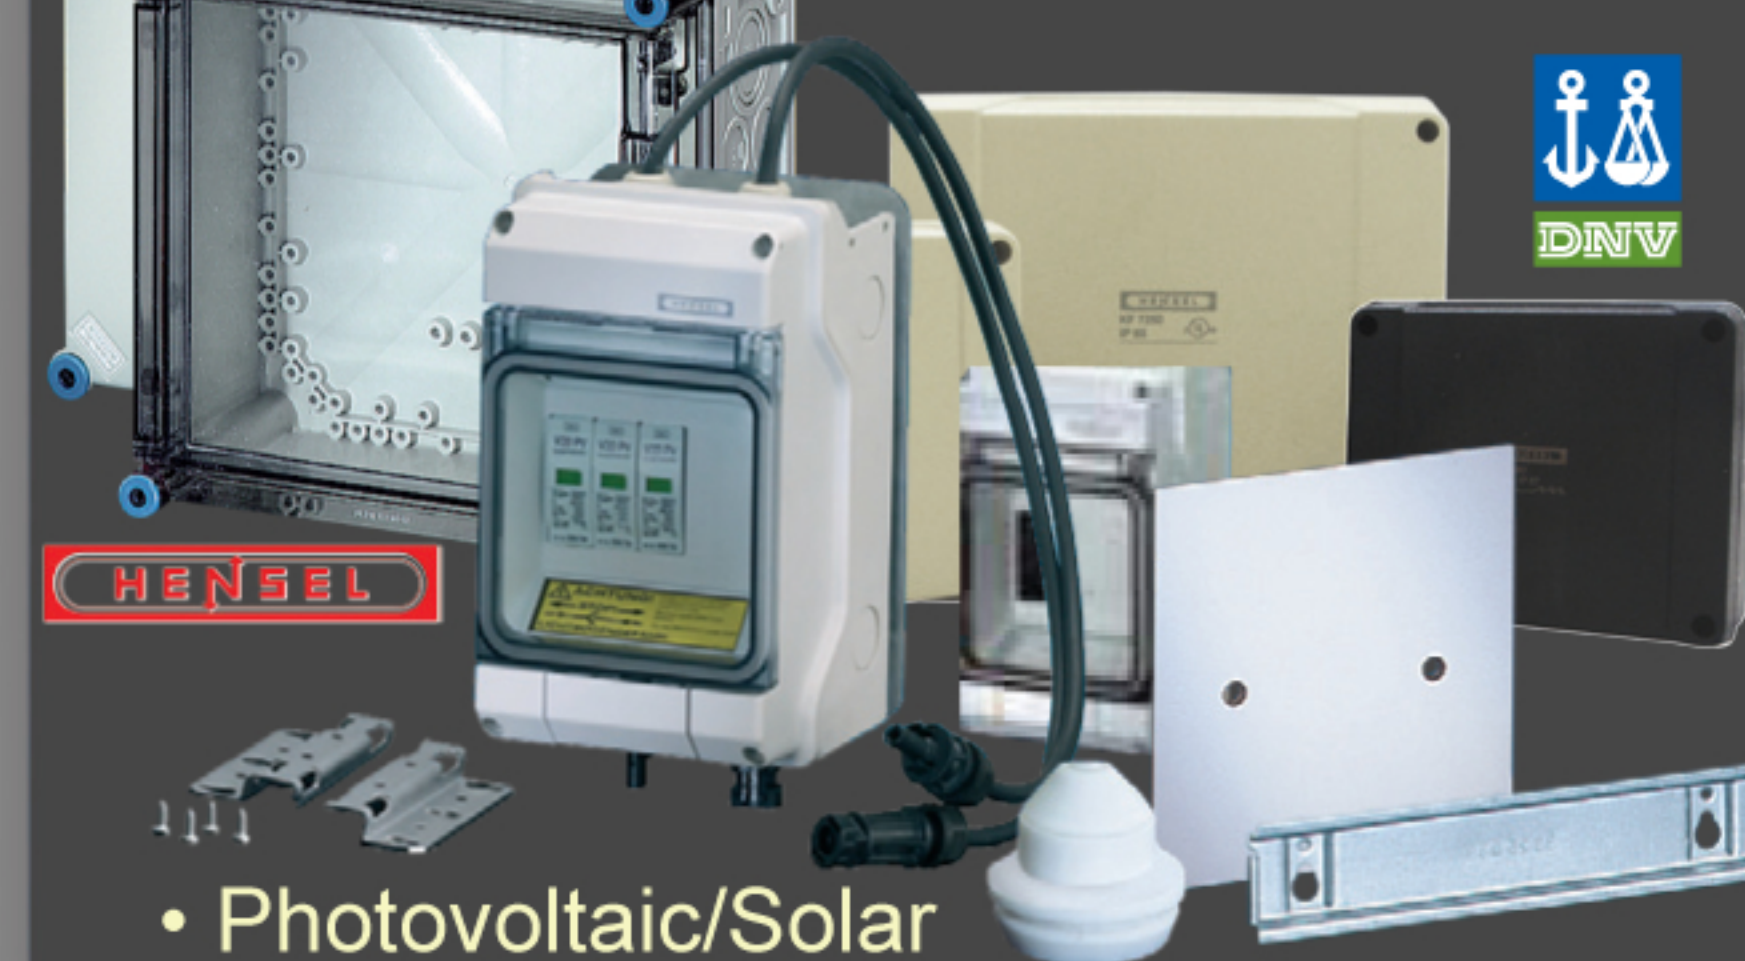

Aluminum Enclosures

- 1, 2 or 3 Button Momentary Option
- Emergency Button
- Normally Open
- Normally Closed

Industrial Enclosures

Materials:

- Polycarbonate
- ABS
- Polystyrene
- Aluminum
- Powder-coated Steel
- Stainless Steel
- Polyester



Features: Square/rectangle shape, Solid & transparent lids, Smooth walls or PG/Metric knockouts, Flanges, Extension Frames, Hinges & Latches.

Applications: Indoor/Outdoor, Medical, Offshore, Marine, Wi-Fi, Packaging Systems, Irrigation Wiring, Hazardous Areas, etc.

Accessories: Mounting Plates, DIN Rails, Lugs, Clips, Screws, etc.

Customization: with Cord Grips, Circular Connectors, Push Buttons, etc.

Featured Products

Cables & Wires

A one stop source for wires and cables requiring RoHS, UL, CSA, CE, VDE, Harmonized & NFPA approvals. We offer Cables for Power, Control, Trayrated, Hi/Low Temp., Hi-Flex, Robotic, Track & Drag Chain, Servo, VFD, Composite, Ribbon, Data (CAT), All-Weather, Single Conductor, Etc!

Samples Available!

\$25 Million Inventory! 31,000+ Items in Stock!

No Minimum Orders!

2014 Catalogs Are Available!

Traycontrol 600 / 600-C : UL/ AWM/CSA TC

- Temperature Range: -40°C to +90°C
- Nominal Voltage: TC 600 V, AWM 1000 V, WTTC 1000 V
- Minimum Bending Radius: Approx. 5 x cable Ø
- Insulation Resistance: Min. 20 MOhm x km
- Radiation Resistance: Up to 80 x 10⁶ cJ/kg (up to 80 Mrad)
- Application: Suitable for installation in dry, humid and damp environments, in the open and in pipes.

RoHS

Portable CORD



Topflex 600 VFD

- Self-extinguishing and flame retardant in accordance with CSA FT4.
- UV & Oil resistant, EMI, Flexible motor supply cable, NFPA 79 Edition 2007
- Produced with cadmium free material, no silicone, and free from substances harmful to the wetting properties of lacquers.

Traycontrol 600 / 600-C : UL/ AWM/CSA TC

- Temperature Range: -40°C to +90°C
- Nominal Voltage: TC 600 V, AWM 1000 V, WTTC 1000 V
- Minimum Bending Radius: Approx. 5 x cable Ø
- Insulation Resistance: Min. 20 MOhm x km
- Radiation Resistance: Up to 80 x 10⁶ cJ/kg (up to 80 Mrad)
- Application: Suitable for installation in dry, humid and damp environments, in the open and in pipes.

For more information call us or visit our website!

The Cable, Wire & Enclosure Experts!