



Cable Glands and Fittings for Hazardous Duty Locations

Armored



Non-Armored



Approvals: IECEx, ATEX, Ex-d / Ex-e / Ex-tD
Zones: 1, 2, 20, 21 & 22

Gas Groups: IIA, IIB & IIC – Apparatus Group
III Equipment Protection Level GbDa
Interlocking Armor Cone Halogen &
Phosphorous-free.

Included: Silicone Seals & O-Rings
Zero Torsion on Cable Core & Armor, Dual
Seal Fast & Easy Assembly with Maximum
Grip.

Temperature Range: -76°F to 221°F (-60°C to
+105°C) IP 68 (5 BAR), EN 60529.



Circular Connectors


Sizes: M16, M23, M27, M40, RJ45,
Industrial Ethernet, PoE, Twintus, Etc.

Signal: 3 - 28 pins (8 - 20 Amps)

Power: 6 & 8 pins (8 - 55 Amps)

Types: Standard, Straight, Elbow, Push-Pull,
Panel Mount, Stainless Steel, Over-mold,
RJ45 & PoE (Power Over Ether)

Applications: Robotic, Medical, Motion
Technology, Automation, Packaging,
Sensors, Renewable Energy, etc.



800-456-9012 / 303-699-1135

www.sealconusa.com/ned



Manufacturing



Renewable Energy



Processing Plant



High Temperature



Robotics



Petro-Chemical



Two Outstanding Companies!
One Dependable Source!
Your Cable & Accessories Solution House!

We Provide Complete Solutions for your Application Needs!



**HI-TECH
CONTROLS, INC.**



HELUKABEL®
ISO 9001: 2008

800-677-8942 / 303-680-5159

www.hitechcontrols.com/ned



Cables & Wires

One Stop Source for Wires & Cables!

Types: Control, Power, Hi-Flex, Track, High
/ Low Temp., Halogen-free, Servo, VFD,
Robotic, Composite, Ribbon, Data
(CAT), Single Conductor, etc!

Approvals: UL, TC-ER & CSA CIC/TC,
WTTTC, CSA FT4, NFPA 79 2007, CE,
VDE, HAR, AWM, MTW, etc.



Pneumatics Components

Fittings: Brass Pipe, Composite, Pro-Fit®,
Acetal/Polypropylene Push In

Valves: Manual, Mechanical, Air-Pilot & Flow
Control Valves.

Cylinders: Mini-Cylinders, Tie-Rod &
Aluminum Profile Cylinders.

FRL Units: Filters, Regulators & Lubricators.



NEW
Solar Enclosures

Industrial Enclosures

Materials: Polycarbonate, ABS, Thermoplastic EMI, Polyester,
Polystyrene, Aluminum, Powder-coated Steel, Stainless Steel.

Features: Square/rectangle shape, Solid & transparent lids, PG/Metric Knockouts
or Smooth Walls, Flanges, Extension Frames, Hinges & Latches.

Applications: Indoor/Outdoor, Medical, Offshore, Marine, Wi-Fi, Hazardous
Areas, Solar, etc.

**2D/3D
CAD!**

**Standard / Elongated / EMI & RFI / Armored / Non-Armored /
Strain Relief, Cable Glands, Cord Grip**

Materials: Nickel Plated Brass, PVDF, Stainless Steel,
Hazardous & Explosive, Intrinsically Safe, etc.

Thread Types: NPT, Metric & PG.

Cable OD: 0.08 - 3.54" (2 - 90 mm)

Benefits: Large Inventory, Great Quality & Affordable Prices, 2D/3D CAD!



Strain Relief Fitting with Female Thread

Material: Nickel Plated Brass Only

Thread Type: 3/8", 1/2", 3/4" & 1" NPT.

- For Sensors, Motors &
Solenoids with Male Threads.
- 70 PSIG, NEMA 4X, IP67.




UV & Ozone Stable

Material: Black Nylon Fittings.

Thread Type: PG, Metric & NPT.

- New TPE membrane insert
(60 different configurations)
- V0 Flame Rated.



**For more information
call us or visit our website!**

Featured Products

**Unsurpassed
Customer Service!**

**One-Stop
Shopping!**

**Samples
Available!**


**No Minimum
Orders!**

**Call for a
Catalog!**

**Contact Us Today
to Receive Your**

**Sealcon or Hi-Tech Controls
2011 Catalogs!**

**\$35 Million
Inventory!**



H07 RN-F

- Resistant to Ozone and Weather.
- Test according to VDE 0482-332-1-2, DIN EN 60332-1-2/ IEC 60332-1.
- Ozone resistant of the insulation to DIN VDE 0472 part 805, test
method A or part 805 A1, test method C.
- Oil resistant.




Topflex 600 VFD

- Self-extinguishing and flame retardant in accordance with CSA FT4.
- The materials used in manufacture are cadmium free, contain no
silicone, and are free from substances harmful to the wetting
properties of lacquers.
- UV-resistant.

Traycontrol 600 / 600-C

- Flexible and Oil-Resistant, Shielded, and EMI
Preferred Type.
- TRAY CABLE for Open Installation.
- TC-ER, PLTC-ER, NFPA 76 Edition 2007.
- 600 V (WTTTC 1000 V)
- Suitable for dry, damp, wet and underground
environments, outdoors and in pipes.

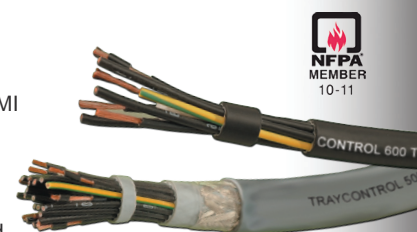

Our Service makes the Difference!

Conduit System

High Pull-Out Resistance, Robust
Performance, Long Life Expectancy,
Fast/Easy Installation, No tools required!

Material: Nylon 6/6, NEMA 4, IP 54/65.

Conduit: Standard and Super Flex
Corrugated Conduit.

Fittings: Push-in, Turn-to-Seal,
Snapclac-DUO (Double-
Sealed Combination Conduit &
Cable Strain Relief Fittings,
Flange / Bulkhead, Mounting
Brackets.



ROMEX® - Registered Trademark of the Southwire Company

The Cable, Wire & Enclosure Experts!

