


Nylon-Fitting DUO-Ms

Push-In With Strain Relief- Nickel Plated Brass



Includes
built-in
strain relief

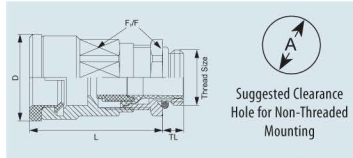

MATERIAL	NICKEL PLATED BRASS
CLAMPING INSERT	NYLON - POLYAMIDE
SEAL	BUNA-N
PROTECTION CATEGORY	IP 54 / IP 68 - 10 BAR / IP 69K
OPERATING TEMPERATURE	-40°F - 212°F (-40°C - 100°C)

Thread Size	Cable Range in (mm)	Thread Length (TL) in (mm)	Body Length (L) in (mm)	Outside Diameter (D) in (mm)	Wrench F ₁ /F in (mm)	Clearance Hole (A) +.01" (.25 mm)	Fits to Poleon DN	Part Numbers
M16 X 1.5	.20 - .39 (5 - 10)	.24 (6)	1.42 (36)	.91 (23)	20/20	.63 (16)	10	DUO16MA-BR
M16 X 1.5	.12 - .28 (3 - 7)	.24 (6)	1.42 (36)	.91 (23)	20/20	.63 (16)	10	DUO16MR-BR
M20 X 1.5	.39 - .55 (10 - 14)	.24 (6)	1.56 (39.5)	.98 (25)	24/22	.79 (20)	12	DUO20MA-BR
M20 X 1.5	.28 - .47 (7 - 12)	.24 (6)	1.56 (39.5)	.98 (25)	24/22	.79 (20)	12	DUO20MR-BR
M20 X 1.5	.39 - .55 (10 - 14)	.24 (6)	1.60 (40.5)	1.14 (29)	28/24	.79 (20)	14	DUO22MA-BR
M20 X 1.5	.28 - .47 (7 - 12)	.24 (6)	1.60 (40.5)	1.14 (29)	28/24	.79 (20)	14	DUO22MR-BR
M25 X 1.5	.51 - .71 (13 - 18)	.28 (7)	1.75 (44.5)	1.18 (30)	30/30	.98 (25)	17	DUO25MA-BR
M25 X 1.5	.35 - .63 (9 - 16)	.28 (7)	1.75 (44.5)	1.18 (30)	30/30	.98 (25)	17	DUO25MR-BR
M32 X 1.5	.71 - .87 (18 - 22)	.31 (8)	1.99 (50.5)	1.54 (39)	40/40	1.26 (32)	23	DUO32MA-BR
M32 X 1.5	.51 - .79 (13 - 20)	.31 (8)	1.99 (50.5)	1.54 (39)	40/40	1.26 (32)	23	DUO32MR-BR
M40 X 1.5	.87 - 1.22 (22 - 31)	.31 (8)	2.22 (56.5)	1.77 (45)	50/50	1.57 (40)	29	DUO40MA-BR
M40 X 1.5	.79 - 1.02 (20 - 26)	.31 (8)	2.22 (56.5)	1.77 (45)	50/50	1.57 (40)	29	DUO40MR-BR
M50 X 1.5	1.26 - 1.42 (32 - 36)	.35 (9)	2.26 (57.5)	2.05 (52)	57/57	1.97 (50)	37	DUO50MA-BR
M50 X 1.5	.98 - 1.22 (25 - 31)	.35 (9)	2.26 (57.5)	2.05 (52)	57/57	1.97 (50)	37	DUO50MR-BR
M63 X 1.5	1.46 - 1.73 (37 - 44)	.39 (10)	2.38 (60.5)	2.05 (52)	68/64	2.48 (63)	50	DUO63MA-BR
M63 X 1.5	1.14 - 1.38 (29 - 35)	.39 (10)	2.38 (60.5)	2.05 (52)	68/64	2.48 (63)	50	DUO63MR-BR
PG11	.20 - .39 (5 - 10)	.24 (6)	1.42 (36)	.91 (23)	20/20	.73 (18.5)	10	DUO11AA-BR
PG11	.12 - .28 (3 - 7)	.24 (6)	1.42 (36)	.91 (23)	20/20	.73 (18.5)	10	DUO11AR-BR
PG13.5	.24 - .47 (6 - 12)	.26 (6.5)	1.56 (39.5)	.98 (25)	24/22	.80 (20.3)	12	DUO13AA-BR
PG13.5	.20 - .35 (5 - 9)	.26 (6.5)	1.56 (39.5)	.98 (25)	24/22	.80 (20.3)	12	DUO13AR-BR
PG16	.39 - .55 (10 - 14)	.26 (6.5)	1.60 (40.5)	1.14 (29)	28/24	.89 (22.5)	14	DUO16AA-BR
PG16	.28 - .47 (7 - 12)	.26 (6.5)	1.60 (40.5)	1.14 (29)	28/24	.89 (22.5)	14	DUO16AR-BR
PG21	.51 - .63 (13 - 16)	.28 (7)	1.75 (44.5)	1.18 (30)	30/30	1.12 (28.4)	17	DUO21AA-BR
PG21	.35 - .63 (9 - 16)	.28 (7)	1.75 (44.5)	1.18 (30)	30/30	1.12 (28.4)	17	DUO21AR-BR
PG29	.71 - .87 (18 - 22)	.31 (8)	1.99 (50.5)	1.54 (39)	40/40	1.47 (37.3)	23	DUO29AA-BR
PG29	.51 - .79 (13 - 20)	.31 (8)	1.99 (50.5)	1.54 (39)	40/40	1.47 (37.3)	23	DUO29AR-BR
PG36	.87 - 1.10 (22 - 28)	.31 (8)	2.22 (56.5)	1.77 (45)	50/50	1.85 (47)	29	DUO36AA-BR
PG36	.79 - 1.02 (20 - 26)	.31 (8)	2.22 (56.5)	1.77 (45)	50/50	1.85 (47)	29	DUO36AR-BR
PG42	1.26 - 1.42 (32 - 36)	.35 (9)	2.26 (57.5)	2.05 (52)	57/57	2.13 (54.1)	37	DUO42AA-BR
PG42	.98 - 1.22 (25 - 31)	.35 (9)	2.26 (57.5)	2.05 (52)	57/57	2.13 (54.1)	37	DUO42AR-BR
PG48	1.46 - 1.73 (37 - 44)	.39 (10)	2.38 (60.5)	2.05 (52)	64/64	2.34 (59.4)	50	DUO48AA-BR
PG48	1.14 - 1.38 (29 - 35)	.39 (10)	2.38 (60.5)	2.05 (52)	64/64	2.34 (59.4)	50	DUO48AR-BR
NPT 1/2"	.39 - .55 (10 - 14)	.51 (13)	1.81 (40.5)	1.14 (29)	28/24	.83 (21.1)	14	DUO16NA-BR
NPT 1/2"	.28 - .47 (7 - 12)	.51 (13)	1.81 (40.5)	1.14 (29)	28/24	.83 (21.1)	14	DUO16NR-BR
NPT 3/4"	.51 - .71 (13 - 18)	.51 (13)	1.97 (44.5)	1.18 (30)	30/30	1.05 (26.7)	17	DUO21NA-BR
NPT 3/4"	.35 - .63 (9 - 16)	.51 (13)	1.97 (44.5)	1.18 (30)	30/30	1.05 (26.7)	17	DUO21NR-BR
NPT 1"	.71 - .87 (18 - 24)	.63 (19)	2.36 (50.5)	1.54 (39)	40/23	1.35 (34.3)	23	DUO29NA-BR
NPT 1"	.51 - .79 (13 - 20)	.63 (19)	2.36 (50.5)	1.54 (39)	40/23	1.35 (34.3)	23	DUO29NR-BR